

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 February 2005 (10.02.2005)

PCT

(10) International Publication Number
WO 2005/011792 A1

(51) International Patent Classification⁷: A61M 25/06, 05/32

(21) International Application Number:
PCT/AU2004/001012

(22) International Filing Date: 30 July 2004 (30.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003903990 31 July 2003 (31.07.2003) AU

(71) Applicant (for all designated States except US): MEDI-
GARD LIMITED [AU/AU]; Office 14A, Tedder
Terraces, 26-30 Tedder Avenue, Main Beach, Queensland
4217 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): RODD, Aaron
[AU/AU]; Unit 2/3 Barbet Place, Burleigh Waters,
Queensland 4220 (AU).

(74) Agent: CULLEN & CO.; Level 26, 239 George Street,
Brisbane, Queensland 4000 (AU).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: CANNULA/CATHETER INTRODUCER WITH RETRACTABLE NEEDLE

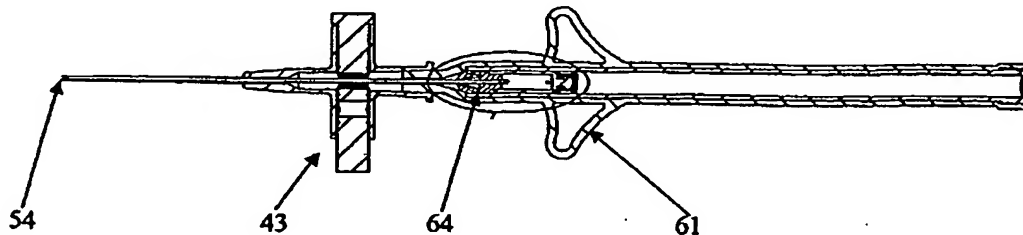

(57) Abstract: A device is disclosed that allows a puncture needle to be inserted into a catheter. Once the puncture needle has performed its function, it can shoot back into the device such that there is a reduced likelihood of needlestick injury. Vacuum is used to assist in the shoot back function.

WO 2005/011792 A1

RECEIVED
22 FEB 2005
CULLEN & CO.

WO 2005/011792

PCT/AU2004/001012

Cannula/catheter introducer with retractable needle

Field of Invention

The present invention relates to cannula or catheter introducer devices and has
5 particular relevance to such devices with retractable needles.

Background Art

Catheter insertion devices are well known in the art. When a catheter is inserted into a
patient for the intravenous delivery of a fluid, a disposable needle passing through the
10 catheter cannula is utilized to make a puncture to permit entry of the tip of the cannula
into the patient. The needle is then withdrawn leaving the catheter in place either for a
direct hook-up to a bottle of fluid to be delivered, or to be capped for later use. The
needle which is now contaminated with blood or other body fluid must be disposed of
without creating a risk of needle sticks to medical personnel which are engaged in the
15 operation of inserting a catheter. A danger to clean up and medical waste disposal
personnel continues if the used needles are not rendered harmless in some way. Caps
or covers that can be mounted over the needle are not a satisfactory solution because
they must be put in place and can become loose and expose the used needle.

20 A discussion of the problems associated with various approaches and uses of cannula
insertion products is found in Kulli, U.S. Pat. No. 4,747,831.

Retractable needles have been recognized as the best solution to these problems.

25 A number of these approaches are disclosed in U.S. Pat. No. 4,747,831 mentioned
above which includes an external latch mechanism which is pushed to release a spring
loaded needle which is withdrawn into the chamber of the device. Some embodiments
have a sliding block and retractable fingers which depress springloaded ears to allow
retraction of the needle holder, ratcheting devices which unlatch the needle holder by
30 rotation of parts and even frangible parts which are broken when a plunger is pushed
forward.

Dysarz, U.S. Pat. No. 5,129,884, is another example of an external latch which may

be disengaged to allow a needle holder to withdraw a needle into the main body of the device. Walter, U.S. Pat. No. 4,828,548, discloses a holder having a piston which may be operated on by vacuum to withdraw a needle. Erskine, U.S. Pat. No. 5,501,675, is a more recent version of a latch-operated device wherein a needle holding part may be released with an external latch.

The devices of the prior art have complicated parts which are difficult to manufacture and especially difficult to assemble in a high speed manufacturing operation. Many of them are prone to premature firing during handling and with some, it is difficult to know when the needle is safe. Disengagement of the catheter assembly from the retraction device is not fully under the timing and control of the medical operator because retraction results in immediate separation of the device from the cannula assembly.

It is an object of the present invention to provide a simplified cannula/catheter introducer which is safe to use and can be produced at a modest cost and which uses a vacuum to retract a contaminated needle to reduce needle stick injury:

Further objects and advantages of the present invention will become apparent from the ensuing description which is given by way of example only.

Disclosure of Invention

In one form, the invention resides in a cannula/catheter introducer comprising an outer tubular member which has a proximal end and a distal end,

an inner tubular member adapted for sliding movement within the outer tubular member, the inner tubular member having an open proximal end, and a closed distal end,

an end member which closes the open proximal end of the inner tubular member,

a sealing means on the end member to sealingly engage with the inner tubular member,

release means on the end member and which is movable between a first position where the release means locks the end member to the inner tubular member,

and a second position where the release means is unlocked from the inner tubular member and allows the end member to retract through the inner tubular member, the inner tubular member being under vacuum, the vacuum functioning to retract the end member from the proximal end of the inner tubular member towards the distal end of the inner tubular member, the release means being movable from the first position to the second position upon movement of the inner tubular member towards the proximal end of the outer tubular member,

a needle holder which is attached to the proximal end of the outer tubular member, release means on the needle holder and which is moveable between a first position where the release means locks the needle holder to the outer tubular member, and a second position where the release means is unlocked from the inner tubular member,

wherein, upon movement of the inner tubular member towards the proximal end of the outer tubular member, the release means on the end member unlocks from the inner tubular member, and locks against the release means on the needle holder, and causes the release means on the needle holder to move to the unlocked position, after which the end member and the needle holder is retracted into the inner tubular member by virtue of the vacuum in the inner tubular member.

In another form, the invention resides in a cannula/catheter introducer comprising an outer tubular member which has a proximal end and a distal end,

an inner tubular member adapted for sliding movement within the outer tubular member, the inner tubular member having an open proximal end and a closed distal end,

an end member which closes the open proximal end of the inner tubular member,

a sealing means on the end member to sealingly engage with the inner tubular member,

release means on the end member and which is movable between a first position where the release means locks the end member to the inner tubular member, and a second position where the release means is unlocked from the inner tubular member and allows the end member to retract through the inner tubular member, the inner tubular member being under vacuum, the vacuum functioning to retract the end

member from the proximal end of the inner tubular member towards the distal end of the inner tubular member, the release means being movable from the first position to the second position upon movement of the inner tubular member towards the proximal end of the outer tubular member,

5 a needle holder which is attached to the proximal end of the outer tubular member, release means on the needle holder and which is moveable between a first position where the release means locks the needle holder to the outer tubular member, and a second position where the release means is unlocked from the inner tubular member,

10 the inner tubular member being movable between a retracted position and an extended position, and when in the retracted position, the tubular member is spaced from the needle holder by a short distance, and when in the extended position, the tubular member triggers retraction of the needle holder, the inner tubular member being held captive within the outer tubular member in the retracted position,

15 wherein upon movement of the inner tubular member towards the proximal end of the outer tubular member, the release means on the end member unlocks from the inner tubular member, and locks against the release means on the needle holder and causes the release means on the needle holder to move to the unlocked position, after which the end member and the needle holder is retracted into
20 the inner tubular member by virtue of the vacuum in the inner tubular member.

In this form of the invention, because the device functions to insert a puncture needle into a catheter or cannula, the device does not function as a syringe. Therefore, the inner tubular member in the initial position is substantially entirely within the outer tubular member and is only a short distance away from the needle holder. For
25 instance, it is envisaged that the inner tubular member can be spaced between 1-20 millimetres from the needle holder, and preferably between 3-10 millimetres. As it is not desirable for the inner tubular member to be retracted too far in the outer tubular member (as the device does not function as a syringe), some form of locking
30 arrangement can be provided to ensure that the inner tubular member can move only by a short distance between the retracted position and the forward (triggering) position.

The introducer can be of any suitable shape and size which will depend, *inter alia*, on the size of the cannula or catheter. It is envisaged that the introducer will be made of suitable material such as plastic although some components (e.g. the sealing means) may be made of rubber or composite materials. However, no particular limitation is to be placed on the invention merely by the material from which the device is manufactured. The size of the introducer can vary, and it is envisaged that the length will be between 50-300 millimetres and typically between 100-200 millimetres. Again, no particular limitation should be placed on the invention merely by the size of the device. The introducer may have a diameter of between 5-50 millimetres and typically between 10-20 millimetres although no particular limitation should be placed on the invention merely by the diameter of the introducer.

The outer tubular member may comprise finger grippable portions to assist in a one-handed operation in depressing the inner tubular member within the outer tubular member. The finger grippable portions may comprise extending members adjacent the proximal end of the outer tubular member and dimensioned to enable fingers to grip these portions.

The proximal end of the outer tubular portion may be restricted in diameter with respect to the remainder of the outer tubular portion. Suitably, the proximal end contains a number of stepped portions to progressively reduce the diameter of the proximal end while still providing internal land portions.

The end of the proximal end of the outer tubular portion may comprise a nozzle adapted for insertion into the rear of a catheter.

Gripping means or locking means may be provided on an inner face at the proximal end of the outer tubular member to assist in gripping or locking the needle holder. The gripping means or locking means may comprise a recess such as an annular groove.

The distal end of the outer tubular member may be provided with a locking means to restrict movement of the inner tubular member relative to the outer tubular member. Suitably, the locking means comprises an enlargement on the outer tubular member

and adjacent the distal end, the enlargement defining a small travelling passageway which defines the limits of movement of the inner tubular member relative to the outer tubular member. The passageway may have a length of between 3-20 millimetres and typically between 3-10 millimetres. The passageway may contain

5 engagement means to "lightly" engage with the inner tubular member. The engagement means may comprise a pair of spaced apart small ribs, which may be annular in configuration. The function of the engagement means may be to lightly hold the inner tubular member in the retracted position such that the inner tubular member does not inadvertently move to the extended position thereby triggering the

10 shoot-back mechanism prematurely. However, the engagement means should be such that a person can press on the back of the inner tubular member to overcome the engagement means when desired.

The inner tubular member, in use, will have reduced pressure, or be under vacuum.

15 The inner tubular member will typically have a closed distal end and an open proximal end, with the open proximal end being closed by the end member. Typically, the inner tubular member will comprise a hollow tube with an open front end. The distal end of the inner tubular member will typically be provided with locking means to lock against the distal end of the outer tubular member in such a

20 manner that the degree of sliding movement of the inner tubular member within the outer tubular member is predetermined. The locking means may comprise a projection which may be an annular rib that sits within the passageway that may be provided on the distal end of the outer tubular member.

25 The end member closes the otherwise open proximal end of the inner tubular member. The end member may comprise a rear portion and a front portion. The rear portion may be substantially closed and may be provided with the sealing means to enable the end member to be sealingly engaged to the inner wall of the inner tubular member in a sliding but sealing manner. The sealing means may comprise a sealing ring that is

30 fitted about the rear portion and which comprises at least one, and preferably a plurality of, spaced-apart ring members that sealingly engage against the inside wall of the inner tubular member.

The front portion may contain or comprise the release means. The release means may be formed integrally with the rear portion. The release means may comprise at least one finger member. The finger member may be resiliently formed to move between a natural first position and a deformed second position. Suitably, the finger member
5 deforms inwardly between the first position and the second position. Suitably, a plurality of finger members is provided and these may be spaced equally about the end member. The or each finger member may extend forwardly from the end member and towards the needle holder.

- 10 The end member may have a length of between 5-20 millimetres although this can vary to suit.

A "flash" chamber may be provided in the end member to enable the first flash of blood or body fluid to be viewed as the puncture needle penetrates into a patient's
15 vein, etc.

The or each finger member in the natural first position may lock against the inner tubular member and preferably lock against the open proximal wall of the inner tubular member. It is preferred that the or each finger member is profiled to facilitate
20 this type of locking. Therefore, it is preferred that the or each finger member contains a step, or a shoulder, or have an arrowhead-type configuration to enable the or each finger member to abut against or lock against the open proximal wall of the inner tubular member.

25 The needle holder is attached to the proximal end of the outer tubular member and is preferably positioned in the stepped or narrowing position of the outer tubular member. The needle holder may be made of any suitable material such as plastic, rubber, composite materials and the like. The needle holder will typically comprise a central body portion. The central body portion may contain a small passageway
30 through which a puncture needle can be fitted to fit the puncture needle to the needle holder. The release means may be formed integrally with the remainder of the needle holder. The release means may comprise at least one finger member. The at least one finger member may be movable or deformable between a natural position which is the

first position and a deformed position which is the second unlocking position. The at least one finger member may be cantilevered from the central body portion and may extend towards the inner tubular member. Suitably, a plurality of finger members is provided and these may be spaced equally about the central body portion. Each finger member may be provided with a terminal configuration which may comprise a shoulder, a step portion, a hook portion, or an arrowhead portion, the function of which is to facilitate engagement with the finger member on the end member as will be described in greater detail below. Also, each finger member may comprise an intermediate projection such as an annular ring which engages into the recess on the outer tubular member to temporarily lock the needle holder to the outer tubular member.

In another form, the invention resides in a cannula/catheter inserter, the inserter comprising

an outer tubular member which has a proximal end and a distal end,
an inner tubular member adapted for sliding movement within the outer tubular member, the inner tubular member having an open proximal end, and a closed distal end,

a needle holding piston assembly which closes the open proximal end of the inner tubular member,

a sealing means on the needle holding piston assembly to sealingly engage with the inner tubular member,

release means on the needle holding piston assembly and which is movable between a first position where the release means locks the needle holding piston assembly to the inner tubular member and a second position where the release means is unlocked from the inner tubular member and allows the needle holding piston assembly to retract through the inner tubular member, the inner tubular member being under vacuum, the vacuum functioning to retract the needle holding piston assembly from the proximal end of the inner tubular member towards the distal end of the inner tubular member, the release means being movable from the first position to the second position upon movement of the inner tubular member towards the proximal end of the outer tubular member,

wherein upon movement of the inner tubular member towards the

proximal end of the outer tubular member, the release means on the needle holding piston assembly unlocks from the inner tubular member, after which the needle holding piston assembly is retracted into the inner tubular member by virtue of the vacuum in the inner tubular member.

5

It is preferred that the inner tubular member is movable between a retracted position and an extended position and when in the retracted position, the tubular member is spaced from the needle holding piston assembly by a short distance and when in the extended position, the tubular member triggers retraction of the needle holding piston
10 assembly, the inner tubular member being held captive within the outer tubular member such that the inner tubular member can only move by the short distance.

The short distance may be as described above and will of course depend on the size of the device. However, it is the intention that the inner tubular member can move
15 forward by only a short distance to trigger the shoot back mechanism. Typically, this distance will be between 1-20 millimetres and preferably between 3-10 millimetres.

Suitably, the inner tubular member and the outer tubular member are substantially as described above with reference to the first embodiment of the invention.

20

The needle holding piston assembly may have a length of between 5-30 millimetres although no particular limitation should be placed on the invention merely by this length. The piston assembly may comprise a main body which has one closed end and one open end and is substantially hollow. The closed end may be provided with an
25 enlargement onto which the sealing member can be positioned. The sealing member may comprise any suitable type of sealing member. The open end may contain a needle mounting block. The needle mounting block typically contains a small passageway through which the puncture needle can pass to fit the puncture needle to the needle mounting block. A small flash chamber may be provided in the main body.
30 The needle mounting block will typically contain the release means. The release means may comprise at least one finger member. Suitably, a plurality of finger members is provided. Each finger member may contain a terminal configuration, which may comprise a step, a shoulder, a hook, or an arrowhead type configuration to

facilitate locking of the finger member and therefore locking of the needle holding piston to the proximal end of the inner tubular member.

5 In another form of the invention, there is provided a cannula/catheter introducer comprising:

- (a) a cannula and catheter connector assembly,
- (b) a retractable needle assembly for assembly with the cannula and catheter assembly, and
- 10 (c) a valving member connected with the cannula and catheter assembly for controlling ingress and egress of fluids from a patient.

The cannula and catheter connector assembly may be provided with an inlet tube for releasable assembly with an outlet tube of a retractable needle.

15

The valving member will typically be manually adjustable from a first sealing position to a second flow position.

20

The valving member may comprise a plunger type valve.

20

Alternatively, the valving member may comprise a turn type valve.

The retractable needle may be of the type described above, and therefore may comprise an outer and inner casing, an outlet from the casing, an internal piston within
25 the inner casing mounting a needle and a sealed compartment between the piston and a closed end of the inner casing.

The sealed compartment contains partial pressure.

30 The outer casing is typically provided with wings for gripping.

The piston may include a transparent vial section which enables a user to establish that the needle has been correctly inserted.

The vial may comprise a minute venting aperture.

With the present invention, the assembled catheter introducer is handled as a unit.

- 5 When the operator verifies that the needle is properly inserted, one hand can hold the connector that remains attached to the patient while the other hand separates the retraction body which upon separation is automatically retracted. A portion of the hand rests against the cannula to prevent blood flow until the other hand inserts the conventional tube into the catheter connector to start the infusion of fluid.
- 10 Immediately after separation, the retraction body safely contains the retracted needle and the removed part is safely discarded.

Brief Description of the Drawings

- Embodiment of the invention will be described with reference to the following
- 15 illustrations.

Figure 1 illustrates a section view of an introducer fitted to a catheter and according to a second embodiment of the invention, and in the "use" position.

- 20 Figure 1a illustrates a close-up view of the proximal part of the introducer and particularly illustrating the needle holding piston.

- Figure 1b illustrates a close-up view of the distal part of the introducer and particularly illustrates the mechanism that limits travel of the inner tubular member in
- 25 the outer tubular member.

- Figures 2 and 2a illustrate initiation of the "shoot back" mechanism where the inner tubular member is being pushed forwardly in the outer tubular member to deform the needle mounting block.

30

Figures 3 and 3a illustrate the needle in the shoot back position.

Figure 4 illustrates the introducer removed from the catheter with the puncture needle

safely within the confines of the inner tubular member.

Figures 5 and 6 illustrate section views of the catheter.

5 Figure 7 illustrates a perspective view of the introducer connected to the catheter.

Figure 8 illustrates a section view of a first embodiment of the invention with the introducer attached to a catheter and in the "use" position.

10 Figure 8a illustrates a close-up of the proximal end of the introducer.

Figure 8b illustrates a close-up of the distal end of the introducer.

15 Figures 9 and 9a illustrate the introducer being moved to trigger the shoot back mechanism.

Figures 9b and 10 illustrate the shoot back position where the puncture needle is safely within the confines of the inner tubular member.

20 Figure 11 illustrates the introducer removed from the catheter.

Figures 12-15 illustrate the valve on the catheter.

25 Figure 16 illustrates a perspective view of the second embodiment of the introducer attached to the catheter.

Detailed Description of the Embodiments

Referring to figures 8-16, there is illustrated a first embodiment of the invention. Briefly, figures 8-9a illustrate a cannula/catheter introducer in the "use" position, while figures 9a-11 illustrate the same introducer in the "shoot back" position. Figures 12-15 illustrate the valve which forms part of the catheter assembly and figure 16 is a perspective view of the device attached to the catheter.

Referring initially to figure 16, there is illustrated a catheter introducer 10 which comprises an outer tube 11. Outer tube 11 contains a pair of finger gripping wings 12. The front of outer tube 11 contains a number of step portions 13 to ultimately finish in an inlet 14.

5

A catheter assembly 15 can be attached to inlet 14 and assembly 15 includes a valve 16 to enable the flow from the catheter needle 17 to be regulated. Figures 12-15 illustrate particularly valve 16. Figure 12 is a section view showing the valve in the "off" position and figure 13 is a plan view showing the valve in the "off" position.

10 Figures 14-15 illustrate similar views with the valve in the "on" position. The valve can be moved manually between the "on" position and the "off" position.

Referring now in greater detail to figures 8, 8a and 8b, there is illustrated details of the device 10. Briefly, the device functions to enable a contaminated needle 18 to be
15 "sucked" back into the main body of the device after use thereby preventing needle stick injury. Briefly, this is achieved by pushing the inner tube 19 forwardly relative to outer tube 11 by distance of only a few millimetres but this movement is sufficient to suck back a contaminated needle. This will now be described in greater detail.

20 Referring to figures 8, 8a and 8b, there is illustrated the device 10 attached to a catheter assembly 15. Device 10 has an outer tube 11 and an inner tube 19 with the inner tube 19 able to slide within outer tube 11 by a short distance (typically a few millimetres). Outer tube 11 is cylindrical and can have a length of between 10-20 centimetres and a diameter of between 5-20 millimetres although no particular
25 limitation should be placed on the invention merely by these dimensions. Outer tube 11 will typically be made of suitable plastic material. Outer tube 11 has a rear (distal) open end 20 to enable the inner tube 19 to be manipulated. The open end 20 contains an enlarged collar 21 which is best illustrated in figure 8b and which defines a small travelling passageway 22 of a few millimetres.

30

Inner tube 19 is under vacuum and has a closed rear (distal) end 23. This distal end is formed with an annular rib 24 which is designed to move along passageway 22. The annular rib 24 enables inner tube 19 to be moved forwardly (or be pressed into outer

tube 11) which will cause the annular rib 24 to move from the rear position illustrated in figure 8b to a forward position (not illustrated) but where rib 24 has been moved to adjacent the forward end of passageway 22.

- 5 Initially, device 10 is in the position illustrated in figures 8, 8a and 8b. In this position, annular rib 24 is located within a pair of spaced apart internal beads 25 (see figure 8b) to provide a positive location of the inner tube 19 within the outer tube 11, but which still enables a person to push the inner tube out of engagement with the beads 25 when required.

10

Referring to figure 8a, the forward part of outer tube 11 as mentioned above has a number of step portions 13 which terminate in an inlet 14. Inlet 14 is designed to attach to the rear of the catheter assembly 15 as is illustrated in figure 8.

- 15 The puncture needle 18 (see figure 8a) is secured to a needle holder 26 of special design and which forms part of the shoot back mechanism which enables needle 18 to be shot back into the rear of inner tube 19 (see figure 10 and figure 11). Needle holder 26 is initially attached to outer tube 11 but can be detached therefrom as will be described in greater detail below. Needle holder 26 contains a plurality of resilient
20 fingers 27. Each finger 27 contains an outwardly extending rib 28 that extends into a corresponding recess on outer tube 11. This engagement locks needle holder 26 to outer tube 19 and inside the stepped area 13. The advantage of having a needle holder 26 initially locked to outer tube 11 is that there is very little chance that any rearward force on needle 18 will inadvertently release the needle holder prematurely. Also, the
25 needle will not move forwardly during the triggering operation.

The resilient fingers 27 terminate in an arrowhead type configuration 29 and initially this part of the resilient fingers merely extends into the inside of outer tube 11 but is not attached to anything.

30

The other part of the shoot back mechanism comprises an end member 30. End member 30 is initially fitted to the open front (proximal) end of inner tube 19 and is best illustrated in figure 8a. End member 30 comprises a seal 31 which seals against

the inside of inner tube 19 to maintain vacuum inside the inner tube. End member 30 is however prevented against being sucked back into inner tube 19 by a plurality of resilient fingers 32. Fingers 32 are biased to lock against the end of inner tube 19 (see figure 8a) and this arrangement prevents end member 30 from being sucked back into
5 inner tube 19.

The resilient fingers on end member 30 also have an arrowhead type configuration, but the arrangement is such that these resilient fingers are able to lock against the arrowhead configuration 29 on resilient fingers 27 which form part of needle holder
10 26. However, this does not occur until such time as inner tube 19 is pushed forwardly.

In use, a catheter assembly 15 can be fitted to the end of device 10 as illustrated in figure 8 and figure 16. The catheter can then be inserted into a person's vein. The
15 puncture needle 18 becomes contaminated during this procedure. Once the catheter assembly 15 is in place, the conventional technique of removing the puncture needle results in a needle stick risk. However, according to the present invention, once the catheter assembly is in place, a person can push inner tube 19 forwardly in a one-handed operation by grasping the wings 12 with the person's fingers and using the
20 person's palm to push against end 23 of inner tube 19. This causes rib 24 to push past the small locating beads 24 and along passageway 22 (see figure 8b).

This forward movement (only a few millimetres) also causes the forward end of inner tube 19 to move towards the stepped portion 13 of outer tube 11 (this being best
25 illustrated between figure 8a and figure 9a). This forward movement causes the arrowhead configuration on the end of fingers 32 to contact an internal tapering face 34 (see figure 9a) which causes the fingers 32 to be pushed inwardly. As this occurs, fingers 32 are released from the inner edge of inner tube 19. As it is these fingers 32 that prevent end member 30 from being sucked back, as soon as the fingers are
30 released, the end member will be sucked back into the distal portion of inner tube 19.

Importantly, as fingers 32 are pushed inwardly and become released from the edge of inner tube 19, they also engage behind the arrowhead formation of fingers 27 which

form part of needle holder 26. Thus, as the fingers 32 are pushed inwardly, they lock against fingers 27 and this means that the end member 30 becomes locked to needle holder 26.

5 Therefore, as end member 30 is sucked back into the distal end of inner tube 19, it also drags back needle holder 26 and therefore the contaminated puncture needle 18, this position being illustrated in figure 10 and figure 11.

10 The arrangement of having the needle holder 26 initially attached to outer tube 11 means that the puncture needle 18 exhibits no forward movement by virtue of any of the shoot back mechanism which forms part of the present invention.

Figures 12-15 illustrate the turn valve on the catheter. The valve can turn manually between an open position and a closed position as illustrated in the figures.

15

Figures 1-7 illustrate a second embodiment of the invention. This embodiment also uses vacuum to suck back the contaminated needle and is similar to the embodiment described with reference to figures 8-16. However, one difference is that instead of a two-part needle holder/end member arrangement which is described in the first embodiment, the second embodiment describes a single unit which in the second embodiment is called a needle holding piston assembly. One difference in the use of the second embodiment of the invention is that triggering the shoot back mechanism does result in the puncture needle moving forward by a few millimetres before being shot back into the inner tube. Occasionally, this slight forward movement can create discomfort to a patient.

25

The second embodiment (figures 1-7) provides a cannula/catheter introducer combination comprising a cannula and catheter assembly generally indicated by arrow 41 (see figure 7) and a retractable needle assembly generally indicated by arrow 42 for connection to the cannula/catheter combination.

30

The cannula/catheter assembly 41 is provided with a valving member generally indicated by arrow 43 for controlling the ingress and egress of fluids from a patient.

The cannula/catheter assembly is provided with a body 44 having an inlet 45 (figures 5 and 6) and an outlet 46 and the valving member intersects with a valve body 47. The inlet 45 and outlet 46 respectively provide a needle aperture 48 and a slightly tapered socket 49 for connection with an outlet nozzle 50 (see figure 1a) of the needle assembly.

The valving member 43 includes a valve plunger 51 which is adjustable from a first sealing position (figure 5) and a second flow position (figure 6).

10

The plunger 51 has an aperture 52 therein supporting a resilient pierceable gasket 53. The gasket 53 allows a puncture needle 54 to pass through it and when the needle is withdrawn it closes to seal off the needle penetration.

15 The plunger is also provided with a peripheral fluted portion 55 which when positioned in the fluid mainstream 16 (see figure 6) allows fluid to pass in both directions.

O-ring seals 57 ensure fluid tight sealing.

20

The retractable needle assembly 42 comprises outer and inner tubes 58, 59 respectively (see figure 1) with the inner tube 59 being a sliding fit in the outer tube 58.

25 The outer tube 58 comprises a bore and has an open rear (distal) end 60 (see figure 1b) and is provided with forward finger gripping wings 61. The front (proximal) end of the outer tube has a nozzle 50 that inserts into the socket 49 on the cannula/catheter.

The inner tube 59 has a closed rear (distal) end 62 (see figure 1b) and an open front 30 (proximal) end 63 (see figure 1a).

A needle holding piston assembly 64 (see figure 1a) is a sliding fit within the inner tube 59. The piston assembly 64 comprises a hollow tubular body 65, which has an

open front end and a closed rear end. The closed rear end has a mounting knob 69. A sealing member 68 is mounted over the knob 69. A needle mounting block 66 is fitted to the open front end of the body 65.

- 5 The piston assembly 64 includes a transparent vial section 70, which enables medical staff to establish that the needle has been correctly inserted when blood flows to the vial and is visually detected.

10 The open distal end 60 of the outer tube 58 (figure 1b) is provided with a shoulder 71 and the closed end 62 of the inner tube 59 has a complementary expanded portion 72 which ensures that the inner tube is secured within the outer tube. Referring especially to figure 1b, it can be seen that this arrangement allows the inner tube to be pushed forwardly into the outer tube by a few millimetres, this distance being defined by the length of the recess 31a (which is a few millimetres). The arrangement also ensures
15 that the inner tube 59 cannot be readily pulled out of the outer tube 58. This short stroke of a few millimetres is however sufficient to trigger the shoot back mechanism of the needle as will be described in greater detail below.

20 The front end of the needle mounting block 66 is provided with a plurality of raked fingers 67. These fingers are formed integrally with the needle mounting block and are resilient. The fingers are designed to lock against the front of inner tube 59. The function of fingers 67 is to prevent the needle holding piston assembly 64 from moving along the inside of inner tube 59 from the proximal end of the inner tube (see figure 1a) to the distal end of inner tube (see, for instance, figure 3 and figure 4).

25 A vacuum is provided in inner tube 59 and seal 68 maintains the vacuum inside inner tube 59. Thus, there is a force acting on the needle holding piston assembly 64 to "suck" the needle holding piston assembly 64 back into inner tube 59 towards the distal end of the inner tube; however the resilient fingers 67 lock against the front of
30 inner tube 59 and prevent the needle holding piston assembly 64 from being sucked back.

The arrangement described immediately above and illustrated in figure 1 and figure

1a, is the initial position of the device.

To dislocate the fingers 67, the end 62 of the inner tube is pushed forward using the palm of the hand whilst gripping the wings 61 with the fingers. The fingers are thereby forced into the tapered section of the nozzle 50 and compressed to the extent
5 that the needle assembly is withdrawn under vacuum, the situation illustrated by figures 3 and 4.

More specifically, inner tube 59 can be pushed forwardly by a few millimetres in the
10 manner described immediately above which moves the expanded portion 72 (see figure 1b) from the position illustrated in figure 1b, to a position (not illustrated) where the expanded portion is now at the other end of the recess 31a. This short distance is sufficient to trigger the needle shoot back mechanism. Specifically, and best illustrated in figure 2a, as the inner tube 59 is pushed forwardly by a few
15 millimetres, it will push the needle holding piston assembly 64 forwardly by a few millimetres. As this occurs, the resilient fingers 67 push forwardly (as they form part of the needle block 66 which is attached to the front of the needle holding piston assembly 64). The front part of outer tube 58 tapers inwardly (see figure 1a) and the resilient fingers 67 are arrow shaped in configuration which means that as the resilient
20 fingers are pushed forwardly, they will be pressed inwardly (see figure 2a), and consequently they will dislodge from the front of inner tube 59. As soon as the fingers 67 have been released from inner tube 59, the vacuum inside inner tube 59 will suck back the needle holding piston assembly 64 thereby retracting the contaminated puncture needle 54 back into the body of inner tube 59, this position being illustrated
25 in figure 3 and figure 4.

The forward movement of inner tube 59 is limited by the arrangement illustrated in figure 1b, and also by a shoulder 73 (see figure 2a) on outer tube 58.

30 Once the cannula/catheter device is secured and the needle assembly removed, the cannula/catheter can be used for the introduction or withdrawal of fluids to and from a patient.

The arrangement is simple to use and, in practice, once the device has been inserted into the cannula assembly 41, the inner tube 59 is pushed forwardly by just a few millimetres without any requirement to rotate the inner tube or use any separate locking mechanisms and upon forward pushing of the inner tube, the contaminated
5 needle 54 is sucked back to the rear of inner tube 59 to render the contaminated needle 54 safe. It is not possible to push or otherwise enable the contaminated needle 54 to emerge from the safety of inner tube 59. The arrangement is a simple one-handed reliable arrangement.

10 Figures 1 and 2 of the drawings show the fully assembled device as delivered for use, figure 3 of the drawings with the needle withdrawn after use, and figure 4 separation of the cannula/catheter from the needle assembly.

Figures 5 and 6 of the drawings show alternative positions of the plunger 51 of the
15 valving member 43.

In figure 5, the plunger 51 is in a first position with the gasket 53 blocking fluid flow.

In figure 6, the plunger 51 has been manually repositioned and the fluted portion 55
20 provides a passage for fluid flow.

Figure 7 of the drawings is an assembly drawing of the device of the present invention in a ready-to-use condition.

25 Aspects of the present invention have been described by way of example only and modifications and additions thereto may be made without departing from the spirit or scope thereof.

CLAIMS:

1. A cannula/catheter introducer comprising
an outer tubular member which has a proximal end and a distal end,
5 an inner tubular member adapted for sliding movement within the
outer tubular member, the inner tubular member having an open proximal end, and a
closed distal end,
an end member which closes the open proximal end of the inner
tubular member,
10 a sealing means on the end member to sealingly engage with the inner
tubular member,
release means on the end member and which is movable between a first
position where the release means locks the end member to the inner tubular member,
and a second position where the release means is unlocked from the inner tubular
15 member and allows the end member to retract through the inner tubular member, the
inner tubular member being under vacuum, the vacuum functioning to retract the end
member from the proximal end of the inner tubular member towards the distal end of
the inner tubular member, the release means being movable from the first position to
the second position upon movement of the inner tubular member towards the
20 proximal end of the outer tubular member,
a needle holder which is attached to the proximal end of the outer
tubular member, release means on the needle holder and which is moveable between a
first position where the release means locks the needle holder to the outer tubular
member, and a second position where the release means is unlocked from the inner
25 tubular member,
wherein, upon movement of the inner tubular member towards the
proximal end of the outer tubular member, the release means on the end member
unlocks from the inner tubular member, and locks against the release means on the
needle holder, and causes the release means on the needle holder to move to the
30 unlocked position, after which the end member and the needle holder is retracted into
the inner tubular member by virtue of the vacuum in the inner tubular member.
2. The introducer as claimed in claim 1 wherein the inner tubular

member is movable between a retracted position and an extended position, and when in the retracted position, the tubular member is spaced from the needle holder by a short distance, and when in the extended position, the tubular member triggers retraction of the needle holder, the inner tubular member being held captive within the
5 outer tubular member in the retracted position.

3. The introducer as claimed in claim 2 wherein the distal end of the outer tubular member and the distal end of the inner tubular member comprise captive means, the captive means comprising a longitudinal passageway in the outer tubular
10 member and a projection extending from the inner tubular member, the projection adapted for movement along the longitudinal passageway to design the travelling limit of the inner tubular member within the outer tubular member.

4. The introducer as claimed in claim 2 wherein the proximal end of the
15 outer tubular portion is restricted in diameter with respect to the remainder of the outer tubular portion and contains a number of stepped portions to progressively reduce the diameter of the proximal end while still providing internal land portions.

5. The introducer as claimed in claim 2 containing gripping means or
20 locking means on an inner wall at the proximal end of the outer tubular member which function to assist in locking the needle holder to the proximal end of the outer tubular member.

6. The introducer as claimed in claim 5 wherein the gripping means or
25 locking means comprises an internal annular groove in the proximal end of the outer tubular member.

7. The introducer as claimed in claim 2 wherein the end member
30 comprises a rear portion and a front portion, the rear portion being substantially closed and containing the sealing means to enable the end member to be sealingly engaged to the inner wall of the inner tubular member in a sliding but sealing manner.

8. The introducer as claimed in claim 7 wherein the front portion contains

the release means.

9. The introducer as claimed in claim 8 wherein the release means comprises at least one finger member which is resilient and which is adapted for movement between a natural first position and a deformed second position.

10. The introducer as claimed in claim 9 wherein the at least one finger member, when in the first position, locks against the open proximal wall of the inner tubular member.

10

11. The introducer as claimed in claim 10 wherein the at least one finger member is provided with an arrowhead configuration to enable the finger member to lock against the open proximal wall of the inner tubular member

15 12. The introducer as claimed in claim 1 wherein the needle holder has a central body portion which contains a passageway to accommodate a puncture needle, the release means being formed integrally with the central body portion.

20 13. The introducer as claimed in claim 12 wherein the release means comprises at least one finger member, the finger member comprising a configuration to enable the finger member to engage with the release means on the end member.

25 14. The introducer as claimed in claim 13 wherein the finger member contains an intermediate projection that engages with a recess in the outer tubular member to releasably lock the needle holder to the outer tubular member.

15. A cannula/catheter inserter, the inserter comprising
an outer tubular member which has a proximal end and a distal end,
an inner tubular member adapted for sliding movement within the
30 outer tubular member, the inner tubular member having an open proximal end and a closed distal end,
a needle holding piston assembly which closes the open proximal end
of the inner tubular member,

a sealing means on the needle holding piston assembly to sealingly engage with the inner tubular member,

release means on the needle holding piston assembly and which is movable between a first position where the release means locks the needle holding piston assembly to the inner tubular member, and a second position where the release means is unlocked from the inner tubular member and allows the needle holding piston assembly to retract through the inner tubular member, the inner tubular member being under vacuum, the vacuum functioning to retract the needle holding piston assembly from the proximal end of the inner tubular member towards the distal end of the inner tubular member, the release means being movable from the first position to the second position upon movement of the inner tubular member towards the proximal end of the outer tubular member,

wherein, upon movement of the inner tubular member towards the proximal end of the outer tubular member, the release means on the needle holding piston assembly unlocks from the inner tubular member, after which the needle holding piston assembly is retracted into the inner tubular member by virtue of the vacuum in the inner tubular member.

16. The inserter as claimed in claim 15 wherein the inner tubular member is movable between a retracted position and an extended position, and when in the retracted position, the tubular member is spaced from the needle holding piston assembly by a short distance, and when in the extended position, the tubular member triggers retraction of the needle holding piston assembly, the inner tubular member being held captive within the outer tubular member such that the inner tubular member can only move by the short distance.

17. A cannula/catheter introducer, the introducer comprising an outer tubular member, an inner tubular member, needle retraction means to enable the puncture needle to be retracted into the inner tubular member upon forward movement of the inner tubular member relative to the outer tubular member, the inner tubular member being substantially inserted into the outer tubular member such that the proximal end of the inner tubular member is adjacent the proximal end of the outer tubular member, the introducer comprising limit means to limit the travel of the inner

tubular member relative to the outer tubular member, the limit means being adjacent a distal end of the introducer.

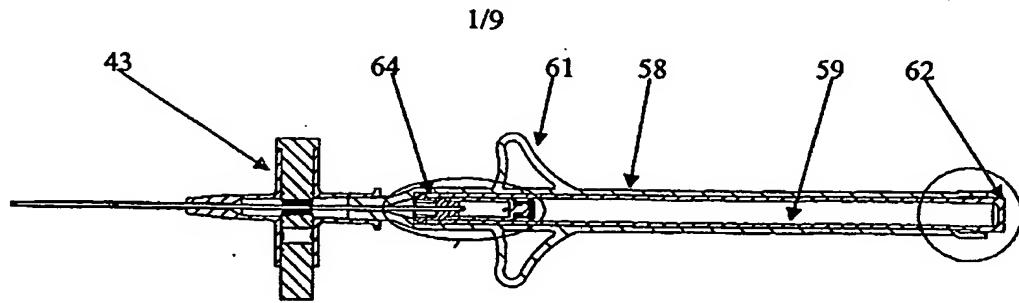


FIG 1

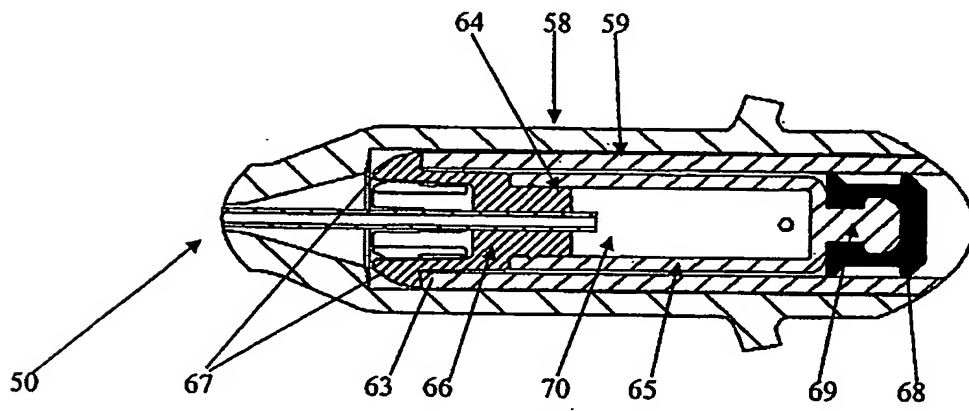


FIG 1A

31A

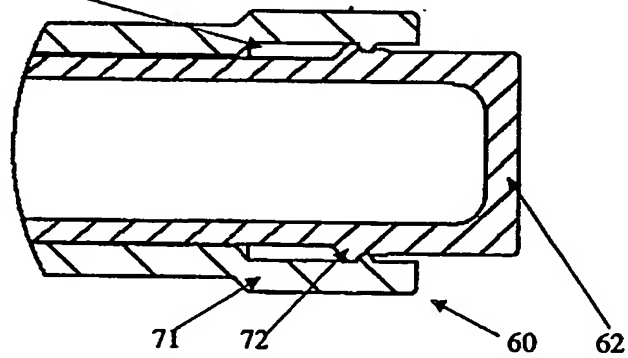


FIG 1B

2/9

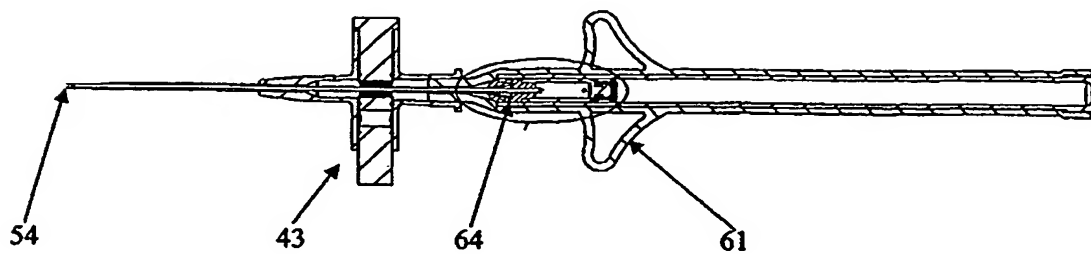


FIG 2

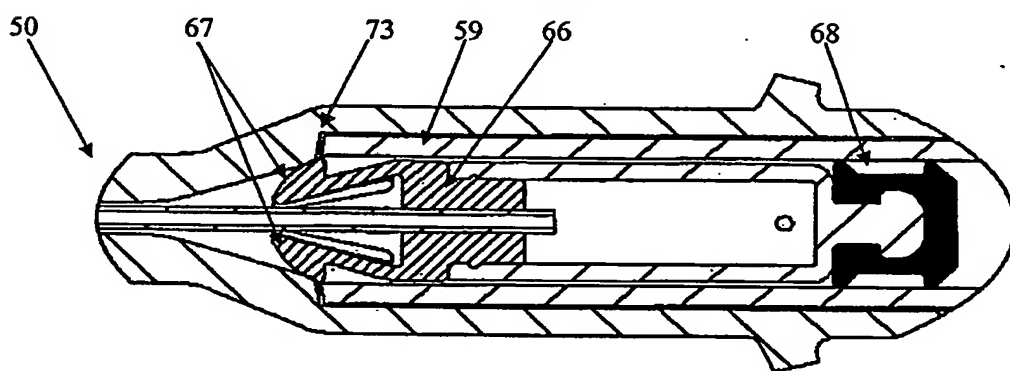


FIG 2A

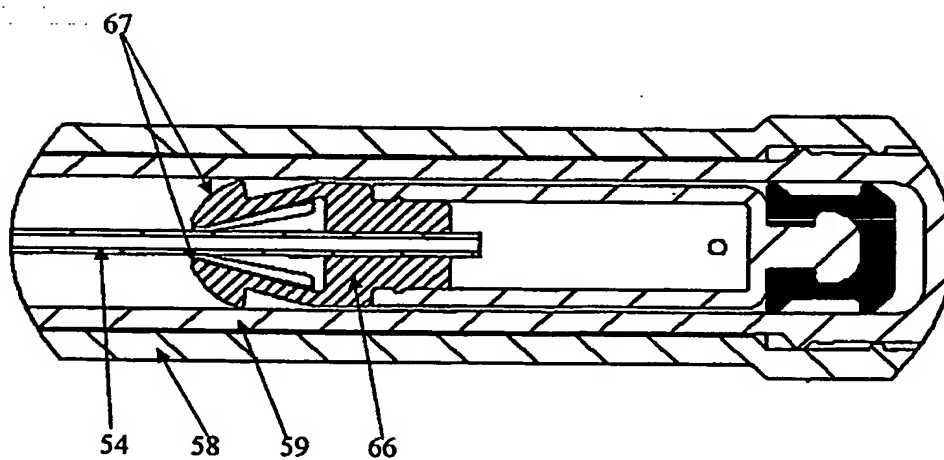


FIG 3A

3/9

FIG 3

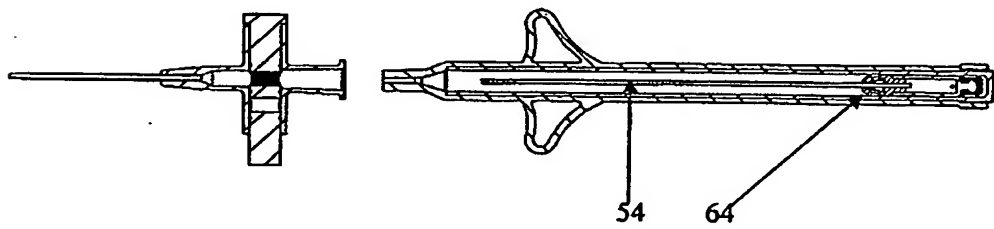
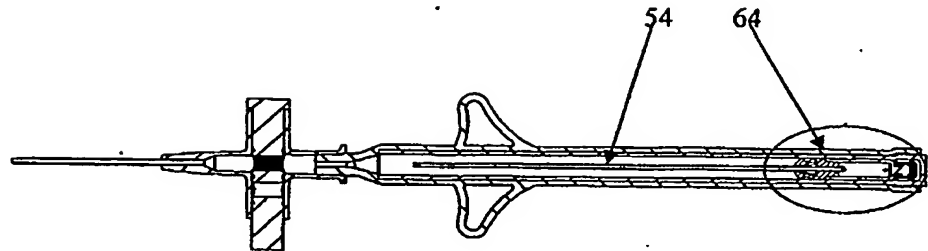


FIG 4

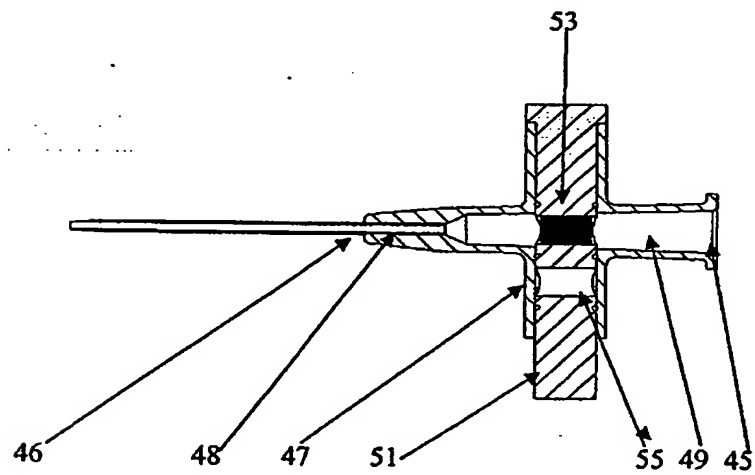


FIG 5

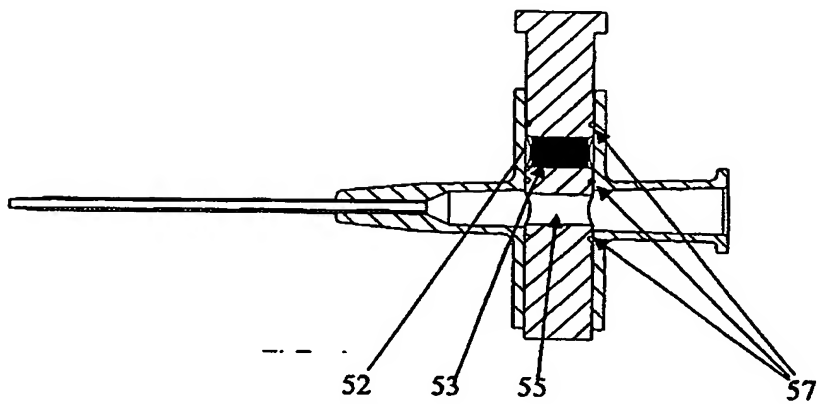


FIG 6

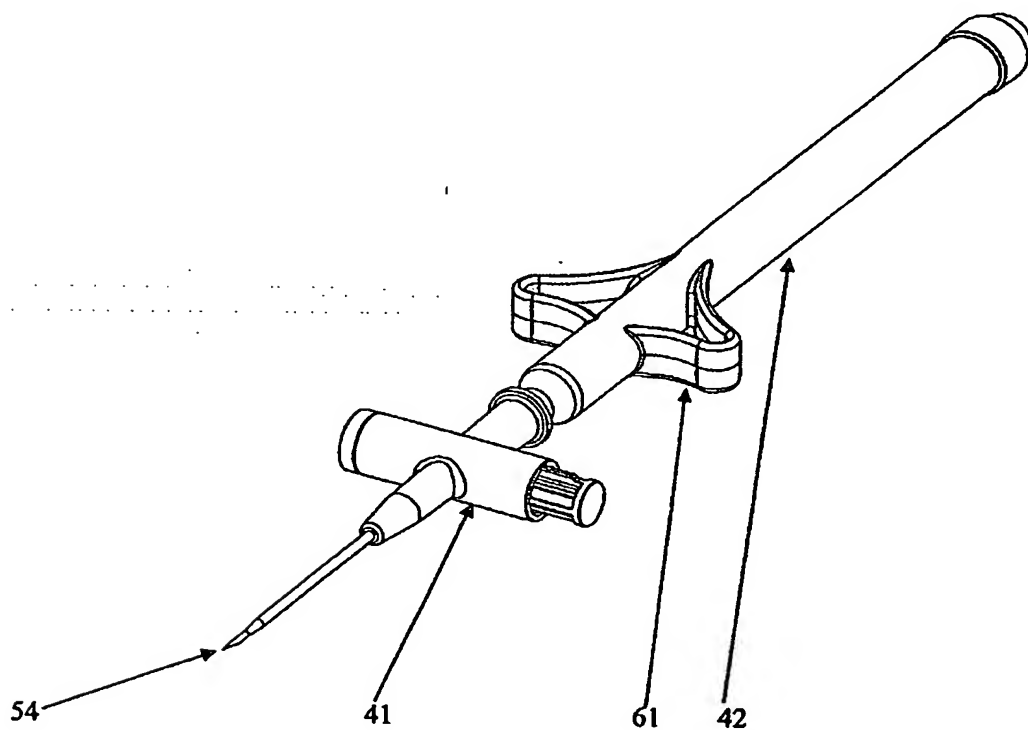


FIG 7

5/9

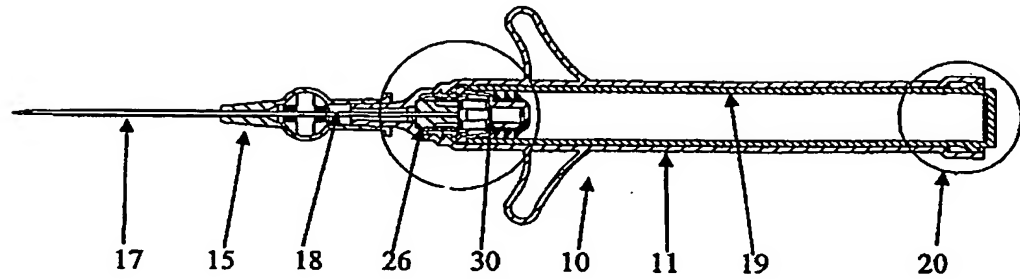


FIG 8

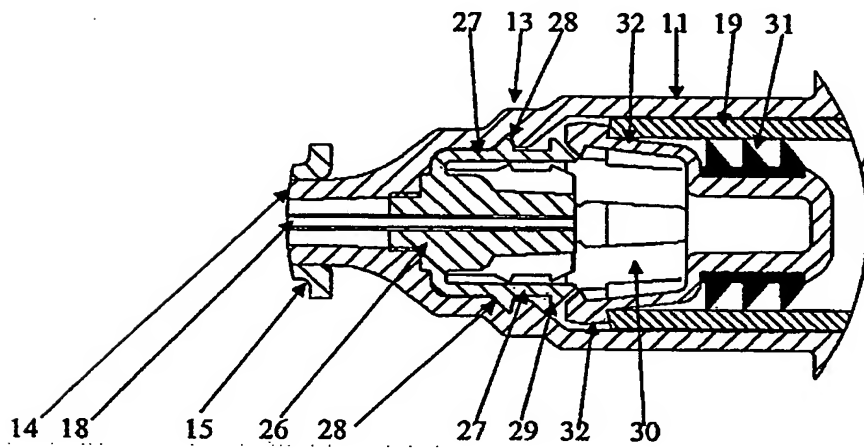


FIG 8A

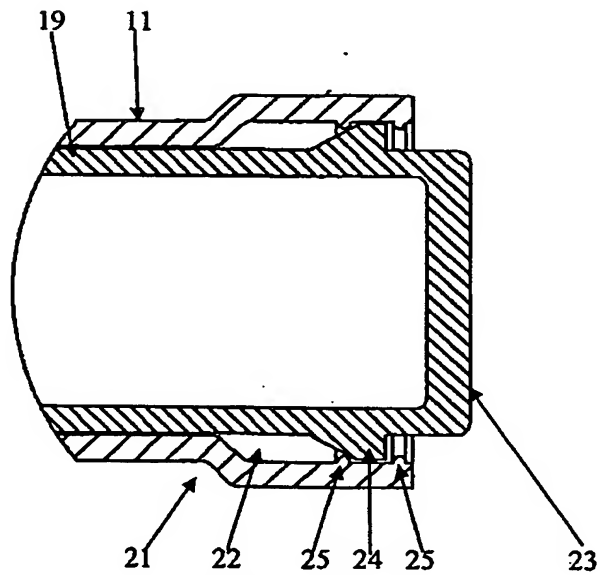


FIG 8B

6/9

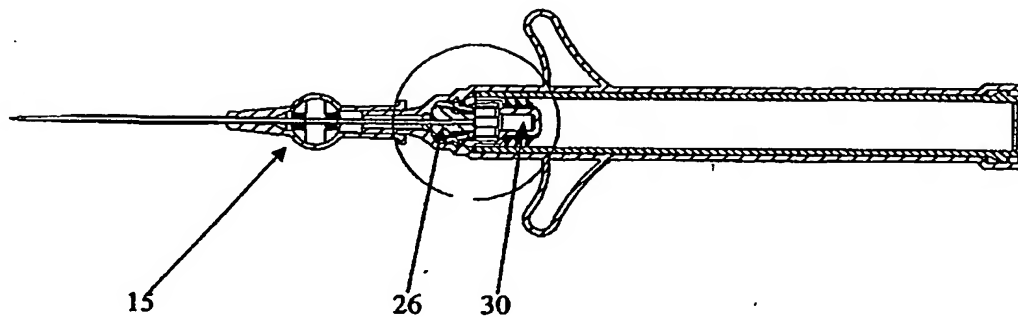


FIG 9

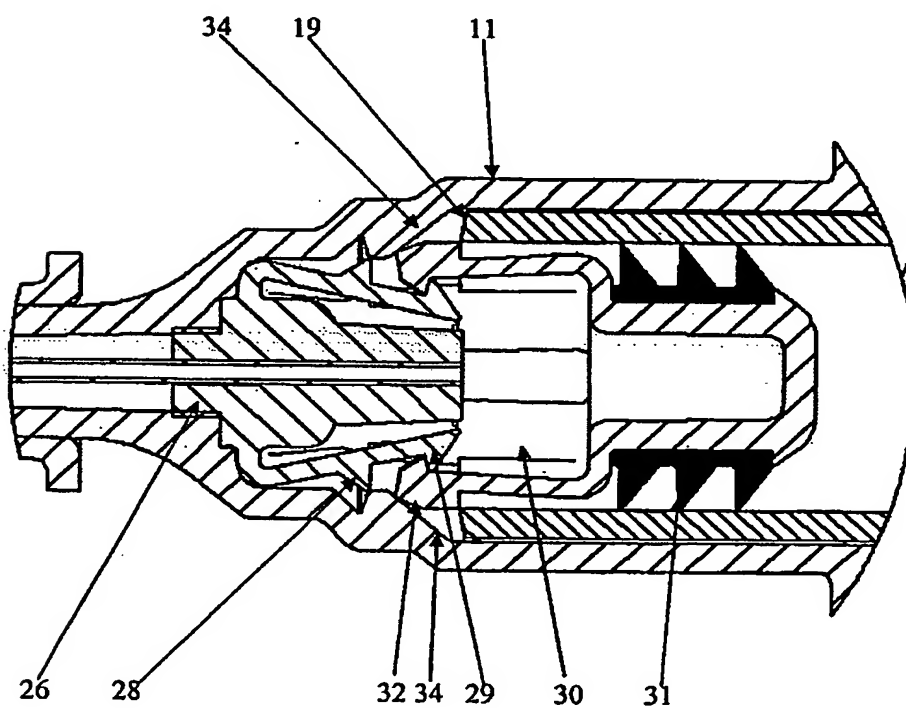


FIG 9A

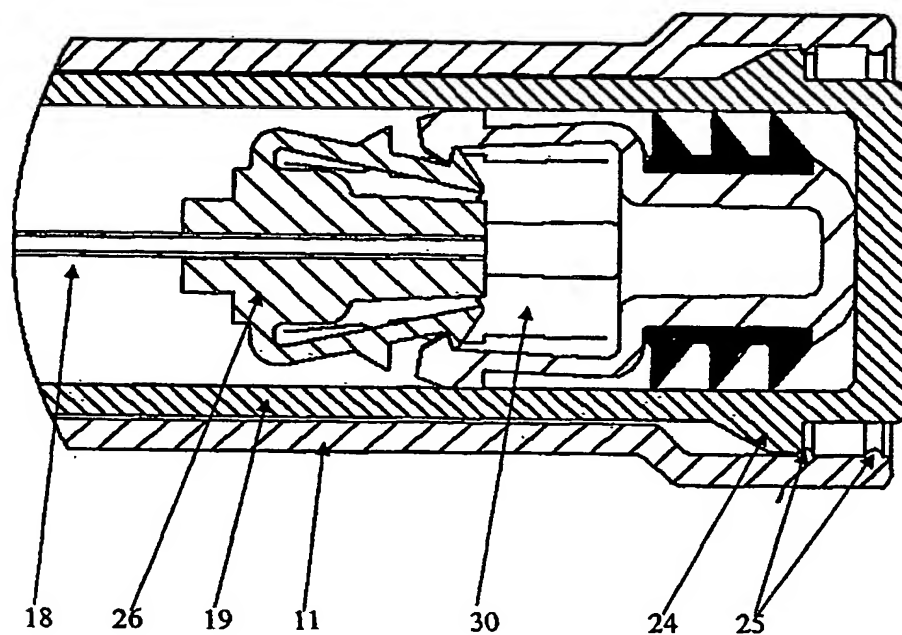


FIG 9B

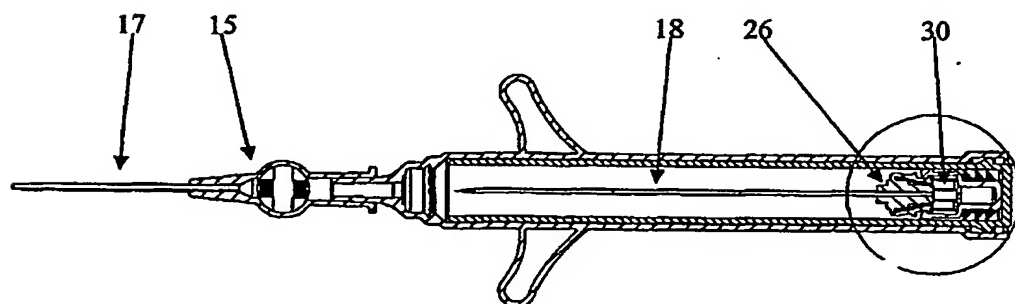


FIG 10

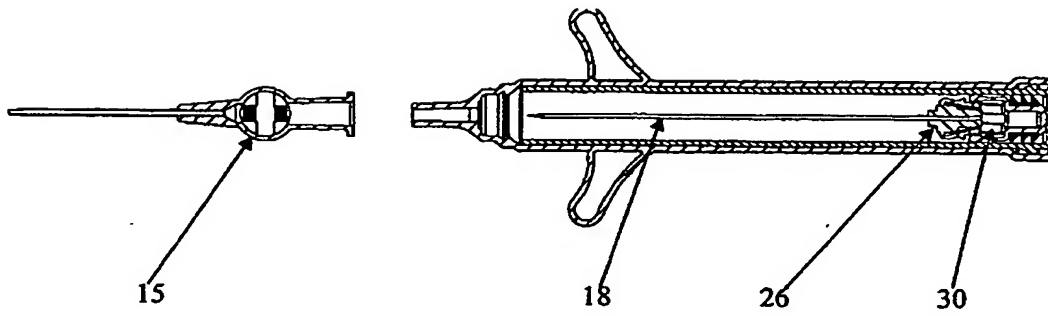


FIG 11




FIG 12




FIG 13





FIG 14



FIG 15

17 16

9/9

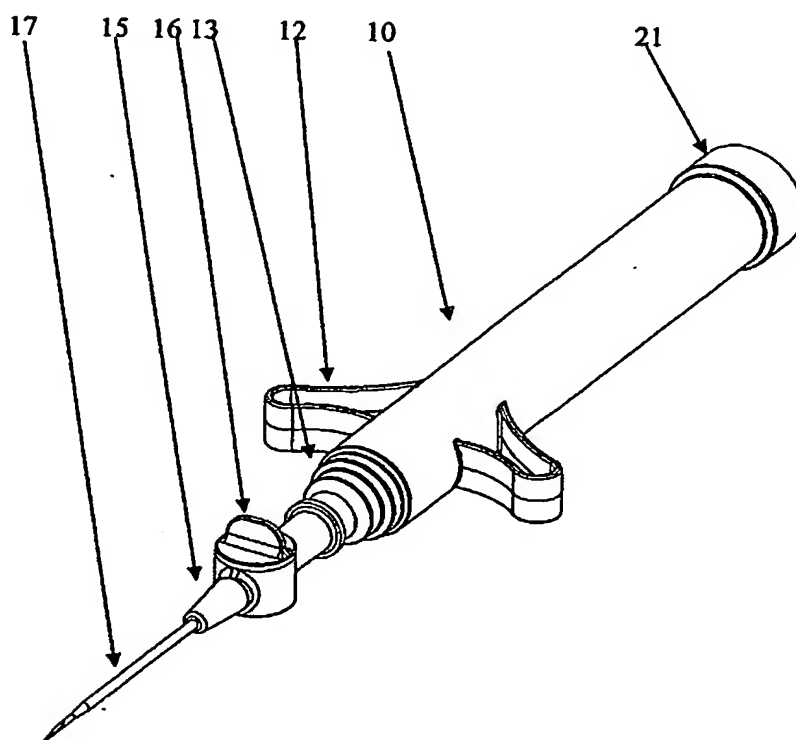

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU2004/001012

A. CLASSIFICATION OF SUBJECT MATTER		
Int. CL ⁷ : A61M 25/06, 5/32		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DWPI-IPC A61M, A61B & keywords (catheter, introduce, retract, vacuum and similar terms); USPTO & Espace with similar terms to those above		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5487734 A (THORNE et al) 30 January 1996 See abstract and figures	1-16
A	US 6024727 A (THORNE et al) 15 February 2000 See abstract and figures	1-16
A	US 5817058 A (SHAW) 6 October 1998 See abstract and figures	17
A	US 5911705 A (HOWELL) 15 June 1999 See abstract and figures	17
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>		
Date of the actual completion of the international search 29 September 2004		Date of mailing of the international search report 5 OCT 2004
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaustralia.gov.au Facsimile No. (02) 6285 3929		Authorized officer STEPHEN CLARK Telephone No : (02) 6283 2781

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU2004/001012

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5830190 A (HOWELL) 3 November 1998 See abstract and figures	17

INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU2004/001012

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a)

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Claims 1-16 relate to a cannula/catheter introducer with inner and outer tubular members, sealing means, release means, a needle holder with a release means where movement of the inner tubular member allows the release means to lock against the needle release means and vacuum retract the needle.

Claim 17 relates to a cannula/catheter introducer with inner and outer tubular members, retraction means for a puncture needle and a limit means to limit the travel of the inner tubular member, located adjacent a distal end of the introducer.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU2004/001012

Box No. IV Text of the Abstract (Continuation of Item 5 of the first sheet)

A catheter/cannula introducer (41) is disclosed that allows a puncture needle (54) to be inserted into a catheter. Once the puncture needle has performed its function, it can shoot back into the device such that there is a reduced likelihood of needlestick injury. Vacuum is used to assist in the shoot back function.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/AU2004/001012

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member			
US	5487734	AU	17565/97	AU	48537/96
		AU	93046/98	BR	9510270
		BR	9712875	BR	9811644
		CA	2215036	CA	2265908
		CN	1171745	CN	1235557
		EP	0837705	EP	1011755
		NO	20001236	NZ	302476
		NZ	334326	NZ	503865
		US	5542927	US	5549708
		US	5656031	US	5823997
		US	5928200	US	5980488
		WO	9621483	WO	9727890
		WO	9912592		
		AU	50837/98	AU	50837/98
		BR	9702089	BR	9702089
		CA	2205831	CA	2205831
		CA	2302622	CA	2302622
		EP	0801579	EP	0801579
		EP	1011759	EP	1011759
		NZ	328873	NZ	328873
		US	5480385	US	5480385
		US	5616135	US	5616135
		US	5836917	US	5836917
		US	6024727	US	6024727
		WO	9819723	WO	9819723
US	6024727	SEE	LISTING	ABOVE	
US	5817058	WO	9828028		
US	5911705	CA	2201055	EP	0799626
		US	5865806	JP	10015075
US	5830190	CA	2206085	EP	0812602
				JP	10052499
Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.					
END OF ANNEX					